

# BAS-102V


## Automatic Serging Machine



### Specifications

		-001	-010	-011
Machine head		Ultra high speed single needle overlock sewing machine with vertical air type chain cutter		
Sewing speed		High speed : 1,600 - 7,500 rpm Low speed : 600 - 6,400 rpm		
Max. stitch length		1.2 - 5.0 mm		
Stitch width		3, 4, 5 mm		
Height of presser foot		5 mm		
Differential ratio		0.7 - 1.3 mm		
No. of needles		1(DC × 27 #11)		
No. of threads		3		
Feed dog	Pitch	1.6 mm		
	Standard	2 row		
Teflon table		-	○	○
Stacker		○	-	○
Cloth-edge control		Pulse motor		
Cloth-edge sensor		Photosensor		
Air pressure		0.49 Mpa 100 l / min		
Motor		DC motor		
Power supply		3-Phase 220 V, 380 V, 415 V 1kVA		
Machine dimensions		1,950 (W) × 720 (D) × 900 (H) mm (With stacker and accessory table)		
Weight		130 kg		

\*Optional table (1,000 (W) × (L) 600 × (H) 900 mm) can be prepared.

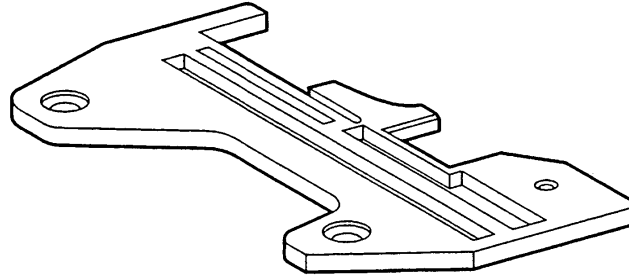

Part name	Part code	Q'ty
< (For 5 mm) Standard parts >		
Needle plate	S30483-001	1
< (For 4 mm) Option parts >		
Needle plate	S30482-001	1