

**SINGER**  
**400W29**

Form 3038w  
(651)  
Supplement for  
Form 2968w  
Printed in U.S.A.

# LIST OF PARTS



FOR

## MACHINE No. 400w29

Which Differs From Machine No. 400w21


\*\* A TRADE MARK OF

THE SINGER MANUFACTURING COMPANY

# INSTRUCTIONS FOR OILING

To ensure easy running and prevent unnecessary wear of the parts which are in movable contact, the machine requires oiling and when in continuous use, "TYPE A" or "TYPE C" OIL, sold only by Singer Sewing Machine Company, should be applied at the beginning of each working day to all oil holes marked "OIL", as instructed in Form 3018w.

"TYPE C" OIL is stainless.

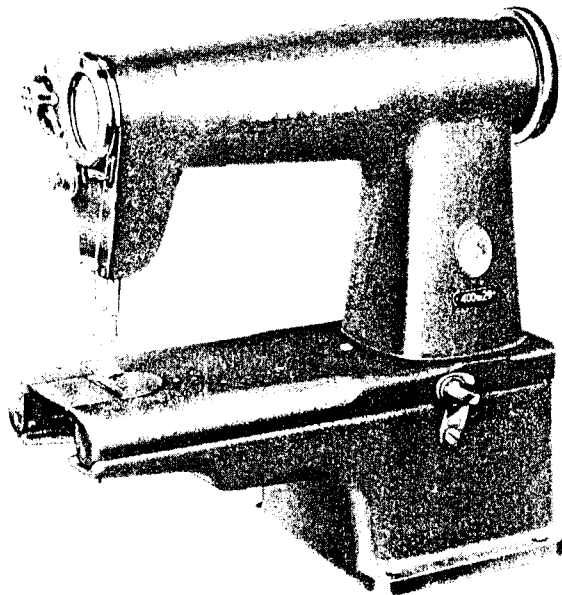

Copyright, U. S. A., 1951, by The Singer Manufacturing Company  
All Rights Reserved for all Countries

## LIST OF PARTS FOR MACHINE No. 400w29

DOUBLE ROTARY DISC TAKE-UP  
HIGH SPEED. CYLINDER BED BASE. DROP FEED.  
SINGLE NEEDLE. LOCK STITCH.  
FOR STITCHING TUBULAR ARTICLES.

Same as Machine No. 400w21 with the following exceptions:

No.	Plate	Name
*270471	-----	Bed
270472	-----	" Base (5 in. high)
203184	18555	" Clamp
200262H	18555	" " Hinge Screw
202622	18555	" " Packing Washer
200728X	18555	" " Thumb Screw
203185	18555	" " Washer
202618	18555	" Hinge
200060H	18555	" " Screw (6)
270404	18555	" Slide
143185	18555	Feed Bar Body with two each 1607C and 51220AL
51220AL	18555	Feed Bar Body Adjusting Screw
1607C	18555	" " " " " Lock Nut
704C	18555	" " " Screw
143186	18555	" " Shank
143187	18555	Feed Bar (tilting, adjustable) complete, Nos. 704C, 143185 and 143186

Note: Nos. 143030, 270008 and 270009, not used

## ACCESSORIES

Same as for Machine No. 400w21 with the following exceptions:

228453	18555	Auxiliary Knee Lifter Rock Lever Rod with 227785
*227785	18555	Auxiliary Knee Lifter Rock Lever Rod Cap
51078	18555	Machine Bolt (4)

ACCESSORIES

No.	Plate	Name
6055	18555	Machine Bolt Washer (4)
228454	18555	" Cushion (felt) (2)
41401	18555	" Rest Pin (wood)

Note: The following three Parts not used

228478	-----	Drip Pan with four 3/4 in. wire nails
12361	-----	Machine Hinge Connection
41400	-----	" Rest Pin (wood)

18555 - 1/2

